



### Setup

- 01 Remove the stroller from box with wheels facing down. Release the side plastic Fold Lock.
- 02 Raise the handles upwards to open.

- 03 Press the Main Lock ① at the back of the stroller downwards to lock, ensuring the 2nd Lock ② and the Top Lock ③ are engaged and functioning.

### Safety Bar

- 04 If required, attach the safety bar to the side tubes below the hinge and clip. **Important: safety bar must be removed to fold stroller.**






### Wheel Assembly

- 05 To assemble front wheels, insert the plastic frame spindle (A) into the wheel housing (B) until it clicks. Check wheel is secure.

- 06 Clip the sunhood canopy to the side tubes above the main hinge. Lock the sunhood forward by pressing downwards on the side levers.

### Operating the Brakes

- 07 Engage brake by pushing lever down and back with foot. **Important: always engage both brakes when stroller is stationary.** To release brake, lift brake upwards with foot.

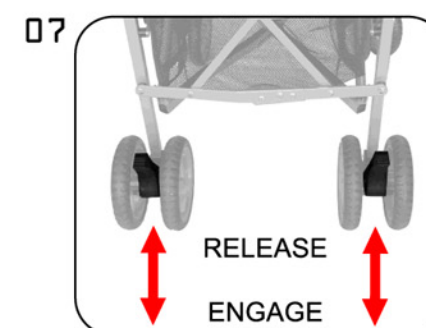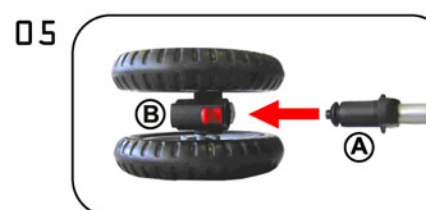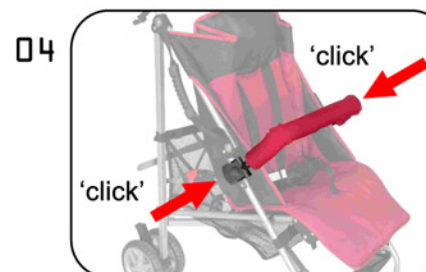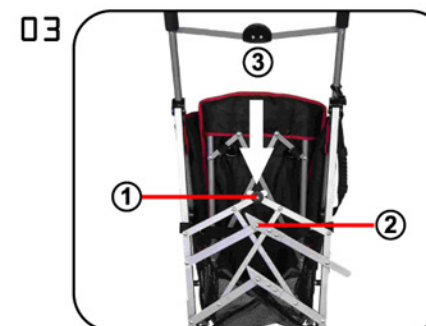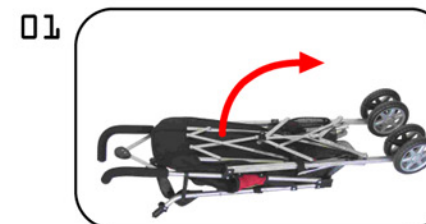

### Safety Harness

- 08 Always secure your child with the safety harness. To fasten, clip both side tongues into the main buckle. Adjust each shoulder, waist and crotch strap for a firm fit. To release - press the clips on each side of the buckle.

### Operation of Swivel Wheel

- 09 To fix the front wheels, set the wheels straight and raise the red lever until it clips into place. To return to the swivel mode, depress the red lever.

### Adjusting the Seat Back

- 10 To lower the seat back angle, press the red levers located behind the seat on each side of stroller. To return seat upright, lift the seat back forward.

### Adjusting the Seat Front

- 11 To raise, lift the front and the levers will automatically engage. To lower, depress the levers on each side and push down.

### Folding the Stroller

- 12 Remove the safety bar if attached. Lift the Main Lock ① up and to the left. Press down on the side of the 2nd Lock ② to release and lift the Top Lock ③. Press the handles forward to fold.

- 13 Secure folded stroller by attaching the side plastic Fold Lock to the front tube.

